



The ELPLAST company is certified according to:
 - EN-ISO 22000:2005 - certificate no 44 281 110582
 - EN ISO 14001:2004 - certificate no 44 104 14460005
 - BRC/IoP - certificate no. PL005890
 The certificates are issued by TUV NORD, Bureau Veritas and refer only to the plant ELPLAST Sp. z o.o. ul. Strazacka 42, 44-240 Zory, Poland



ELPLAST AMERICA
 T: +1 855 357 5278
info@elplastamerica.com
www.elplastamerica.com

ELPLAST EUROPE
 T: +48 32 4730930
info@elplasteurope.com
www.elplasteurope.com

ELPLAST ASIA
 T: +65 6220 9226
info@elplastasia.com
www.elplastasia.com

Profile dimensions

Width		Closure width
S	10 mm ± 0,5 mm	z
S ₁	-	1,50 mm ± 0,1 mm
Flange thickness		Height
a	0,15 mm ± 0,05 mm	h
b	0,30 mm ± 0,05 mm	1,45 mm ± 0,1 mm
c	-	-

Profile weight: 4,5 g/m ± 0,5 g/m

Reel dimensions

Reel type	A	-
Outer diameter	500 mm	-
Inner diameter	200 mm	-
Core diameter	40,2 mm	-
Reel width	395 mm	-

Packing information

Meters/Reel	5200 m (+~2%)	-
Reels/Pallet	24	-
Meters/Pallet	124800 m (+~2%)	-
Reel weight	26,6 kg ± 11%	-
Pallet size	Length	1200 mm
	Width	1050 mm
	Height	2200 mm

SEALING PROPERTIES:

Sealing temperature range: *120 °C - 220 °C


* Temperature range can vary depending on type of packaging material used and sealing time.

RECOMMENDED STORAGE CONDITIONS:

Temperature: 15-25 °C

Humidity: 35-65%

SPECIFICATION EL-ZIP H0L10PPR2

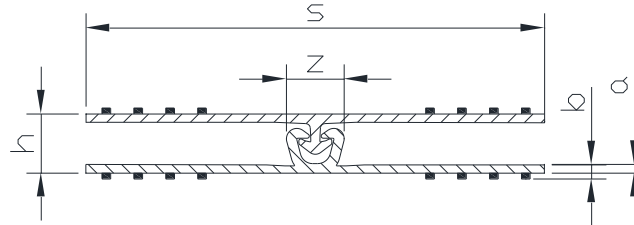

The drawing is a pictorial representation and is not intended to be dimensionally accurate.

GENERAL INFORMATION:

Zipper material(s): LDPE blend with sealing ribs.

Application: Horizontal and vertical packaging machines and bag making machines.

The goods should be stored in a clean, dry and free from infestation, hygienic environment and not exposed to direct sunlight.

Use within 12 months of production date (on FIFO basis).
 Conditioning time in the packaging area before processing:
 min: 24 hours.

Prepared by
 Łukasz Pytelewski

Product Development Specialist
 27.09.2016.

Approved by
 Małgorzata Honek- Martinek

Quality Manager
 27.09.2016.

Profile dimensions

Width		Closure width
S	10 mm ± 0,5 mm	z
S ₁	-	1,50 mm ± 0,1 mm
Flange thickness		Height
a	0,15 mm ± 0,05 mm	h
b	0,30 mm ± 0,05 mm	1,45 mm ± 0,1 mm
c	-	-

Profile weight: 1,37 g/ft ± 0,15 g/ft

Reel dimensions

Reel type	A	-
Outer diameter	500 mm	-
Inner diameter	200 mm	-
Core diameter	40,2 mm	-
Reel width	395 mm	-

Packing information

Feet/Reel	17060.2 ft (+~2%)	-
Reels/Pallet	24	-
Feet/Pallet	409445 ft (+~2%)	-
Reel weight	58,7 lb ± 11%	-
Pallet size	Length	1200 mm
	Width	1050 mm
	Height	2200 mm

SEALING PROPERTIES:

Sealing temperature range: *248 °F - 428 °F

* Temperature range can vary depending on type of packaging material used and sealing time.

RECOMMENDED STORAGE CONDITIONS:

Temperature: 59-77 °F

Humidity: 35-65%

The manufacturer reserves the right to change the content of the specification.