



The ELPLAST company is certified according to:  
 - EN-ISO 22000:2005 - certificate no 44 281 110582  
 - EN ISO 14001:2004 - certificate no 44 104 14460005  
 - BRC/IoP - certificate no. PL005890  
 The certificates are issued by TUV NORD, Bureau Veritas and refer only to the plant ELPLAST Sp. z o.o. ul. Strazacka 42, 44-240 Zory, Poland



**ELPLAST AMERICA**  
 T: +1 855 357 5278  
[info@elplastamerica.com](mailto:info@elplastamerica.com)  
[www.elplastamerica.com](http://www.elplastamerica.com)

**ELPLAST EUROPE**  
 T: +48 32 4730930  
[info@elplasteurope.com](mailto:info@elplasteurope.com)  
[www.elplasteurope.com](http://www.elplasteurope.com)

**ELPLAST ASIA**  
 T: +65 6220 9226  
[info@elplastasia.com](mailto:info@elplastasia.com)  
[www.elplastasia.com](http://www.elplastasia.com)

### Profile dimensions

Width		Closure width
<b>S</b>	10 mm ± 0,5 mm	<b>z</b>
<b>S<sub>1</sub></b>	-	1,50 mm ± 0,1 mm
Flange thickness		Height
<b>a</b>	0,15 mm ± 0,05 mm	<b>h</b>
<b>b</b>	0,30 mm ± 0,05 mm	1,45 mm ± 0,1 mm
<b>c</b>	-	-

**Profile weight:** 4,5 g/m ± 0,5 g/m

### Reel dimensions

Reel type	A	-
<b>Outer diameter</b>	500 mm	-
<b>Inner diameter</b>	200 mm	-
<b>Core diameter</b>	40,2 mm	-
<b>Reel width</b>	395 mm	-

### Packing information

<b>Meters/Reel</b>	5800 m (+~2%)	-
<b>Reels/Pallet</b>	24	-
<b>Meters/Pallet</b>	139200 m (+~2%)	-
<b>Reel weight</b>	29,7 kg ± 11%	-
<b>Pallet size</b>	Length	1200 mm
	Width	1050 mm
	Height	2200 mm

### SEALING PROPERTIES:

Sealing temperature range: \*120 °C - 220 °C


\* Temperature range can vary depending on type of packaging material used and sealing time.

### RECOMMENDED STORAGE CONDITIONS:

Temperature: 15-25 °C

Humidity: 35-65%

## SPECIFICATION EL-ZIP H0L10SR2

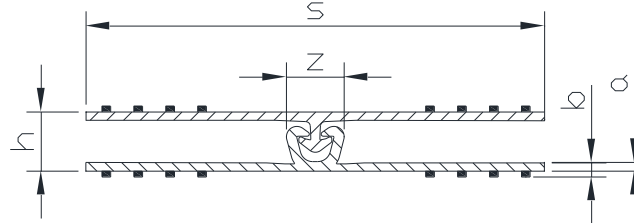

The drawing is a pictorial representation and is not intended to be dimensionally accurate.

### GENERAL INFORMATION:

**Zipper material(s):** LDPE blend with sealing ribs.

**Application:** Horizontal and vertical packaging machines and bag making machines.

The goods should be stored in a clean, dry and free from infestation, hygienic environment and not exposed to direct sunlight.

Use within 12 months of production date (on FIFO basis).  
 Conditioning time in the packaging area before processing:  
 min: 24 hours.

Prepared by  
 Łukasz Pytelewski  
 Product Development Specialist  
 27.09.2016.

Approved by  
 Małgorzata Honek- Martinek  
 Quality Manager  
 27.09.2016.

### Profile dimensions

Width		Closure width
<b>S</b>	10 mm ± 0,5 mm	<b>z</b>
<b>S<sub>1</sub></b>	-	1,50 mm ± 0,1 mm
Flange thickness		Height
<b>a</b>	0,15 mm ± 0,05 mm	<b>h</b>
<b>b</b>	0,30 mm ± 0,05 mm	1,45 mm ± 0,1 mm
<b>c</b>	-	-

**Profile weight:** 1,37 g/ft ± 0,15 g/ft

### Reel dimensions

Reel type	A	-
<b>Outer diameter</b>	500 mm	-
<b>Inner diameter</b>	200 mm	-
<b>Core diameter</b>	40,2 mm	-
<b>Reel width</b>	395 mm	-

### Packing information

<b>Feet/Reel</b>	19028,87 ft (+~2%)	-
<b>Reels/Pallet</b>	24	-
<b>Feet/Pallet</b>	456692,91 ft (+~2%)	-
<b>Reel weight</b>	65,5 lb ± 11%	-
<b>Pallet size</b>	Length	1200 mm
	Width	1050 mm
	Height	2200 mm

### SEALING PROPERTIES:

Sealing temperature range: \*248 °F - 428 °F

\* Temperature range can vary depending on type of packaging material used and sealing time.

### RECOMMENDED STORAGE CONDITIONS:

Temperature: 59-77 °F

Humidity: 35-65%

The manufacturer reserves the right to change the content of the specification.